

Figure 1

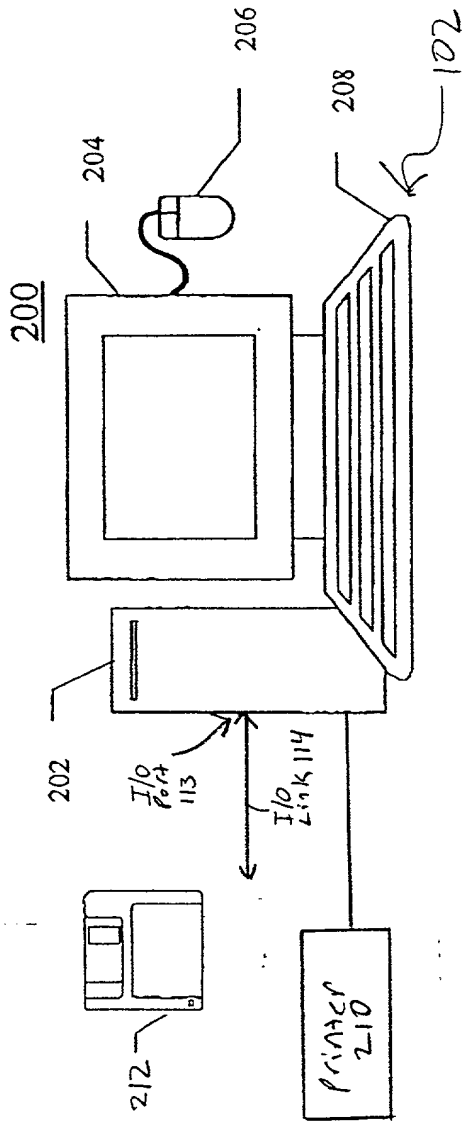


Figure 2a

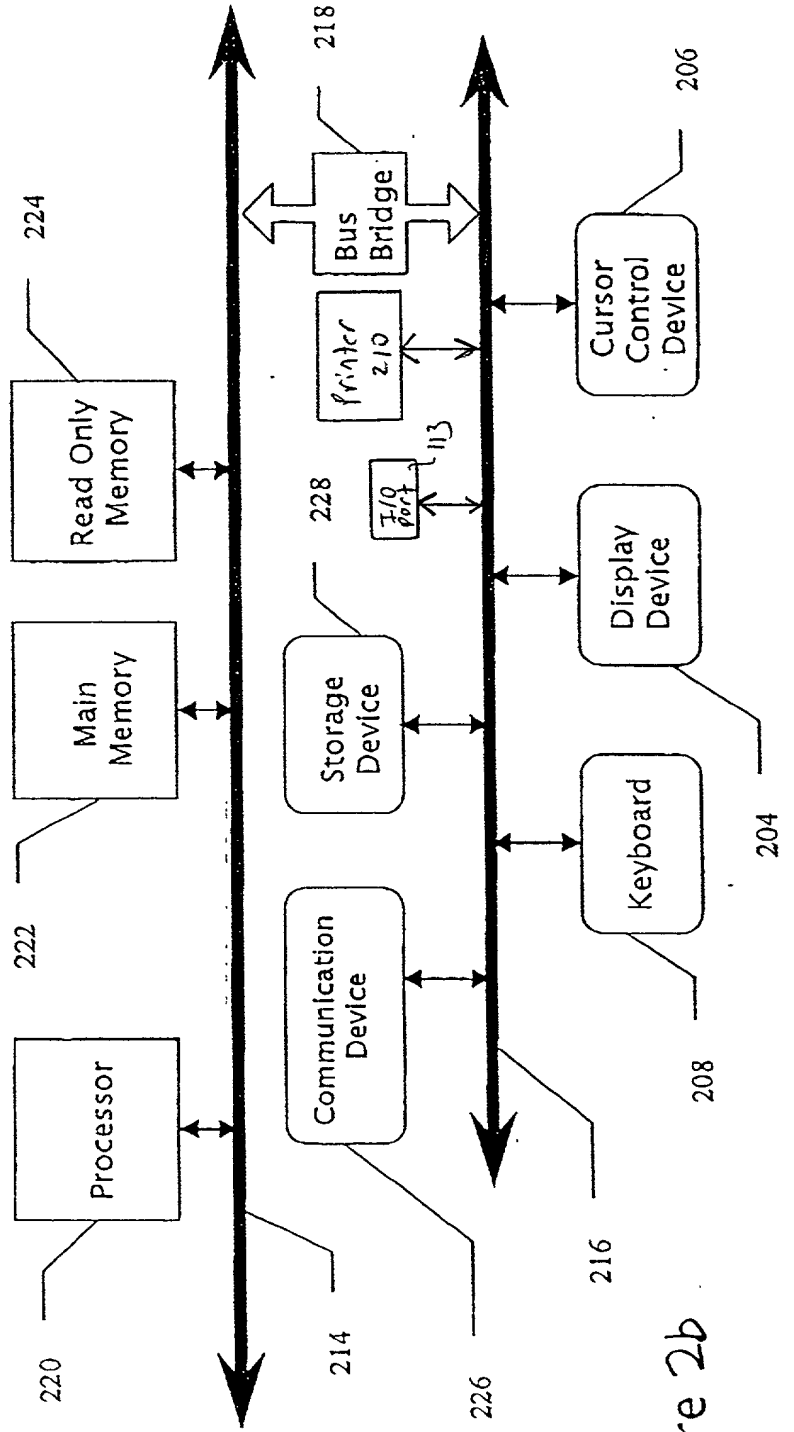


Figure 2b

Interface Device

Top View


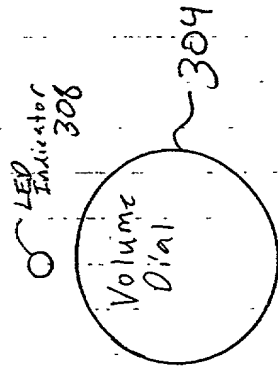


Figure 3a

106



Front View
Figure 3b

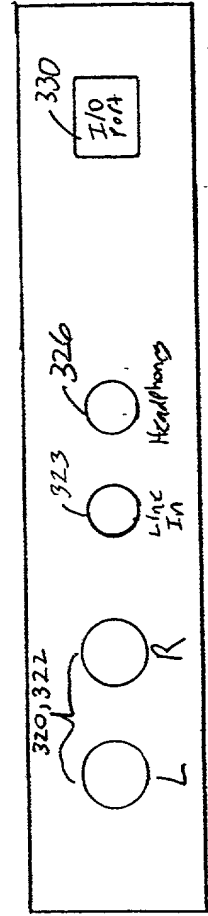

Back View
Figure 3c

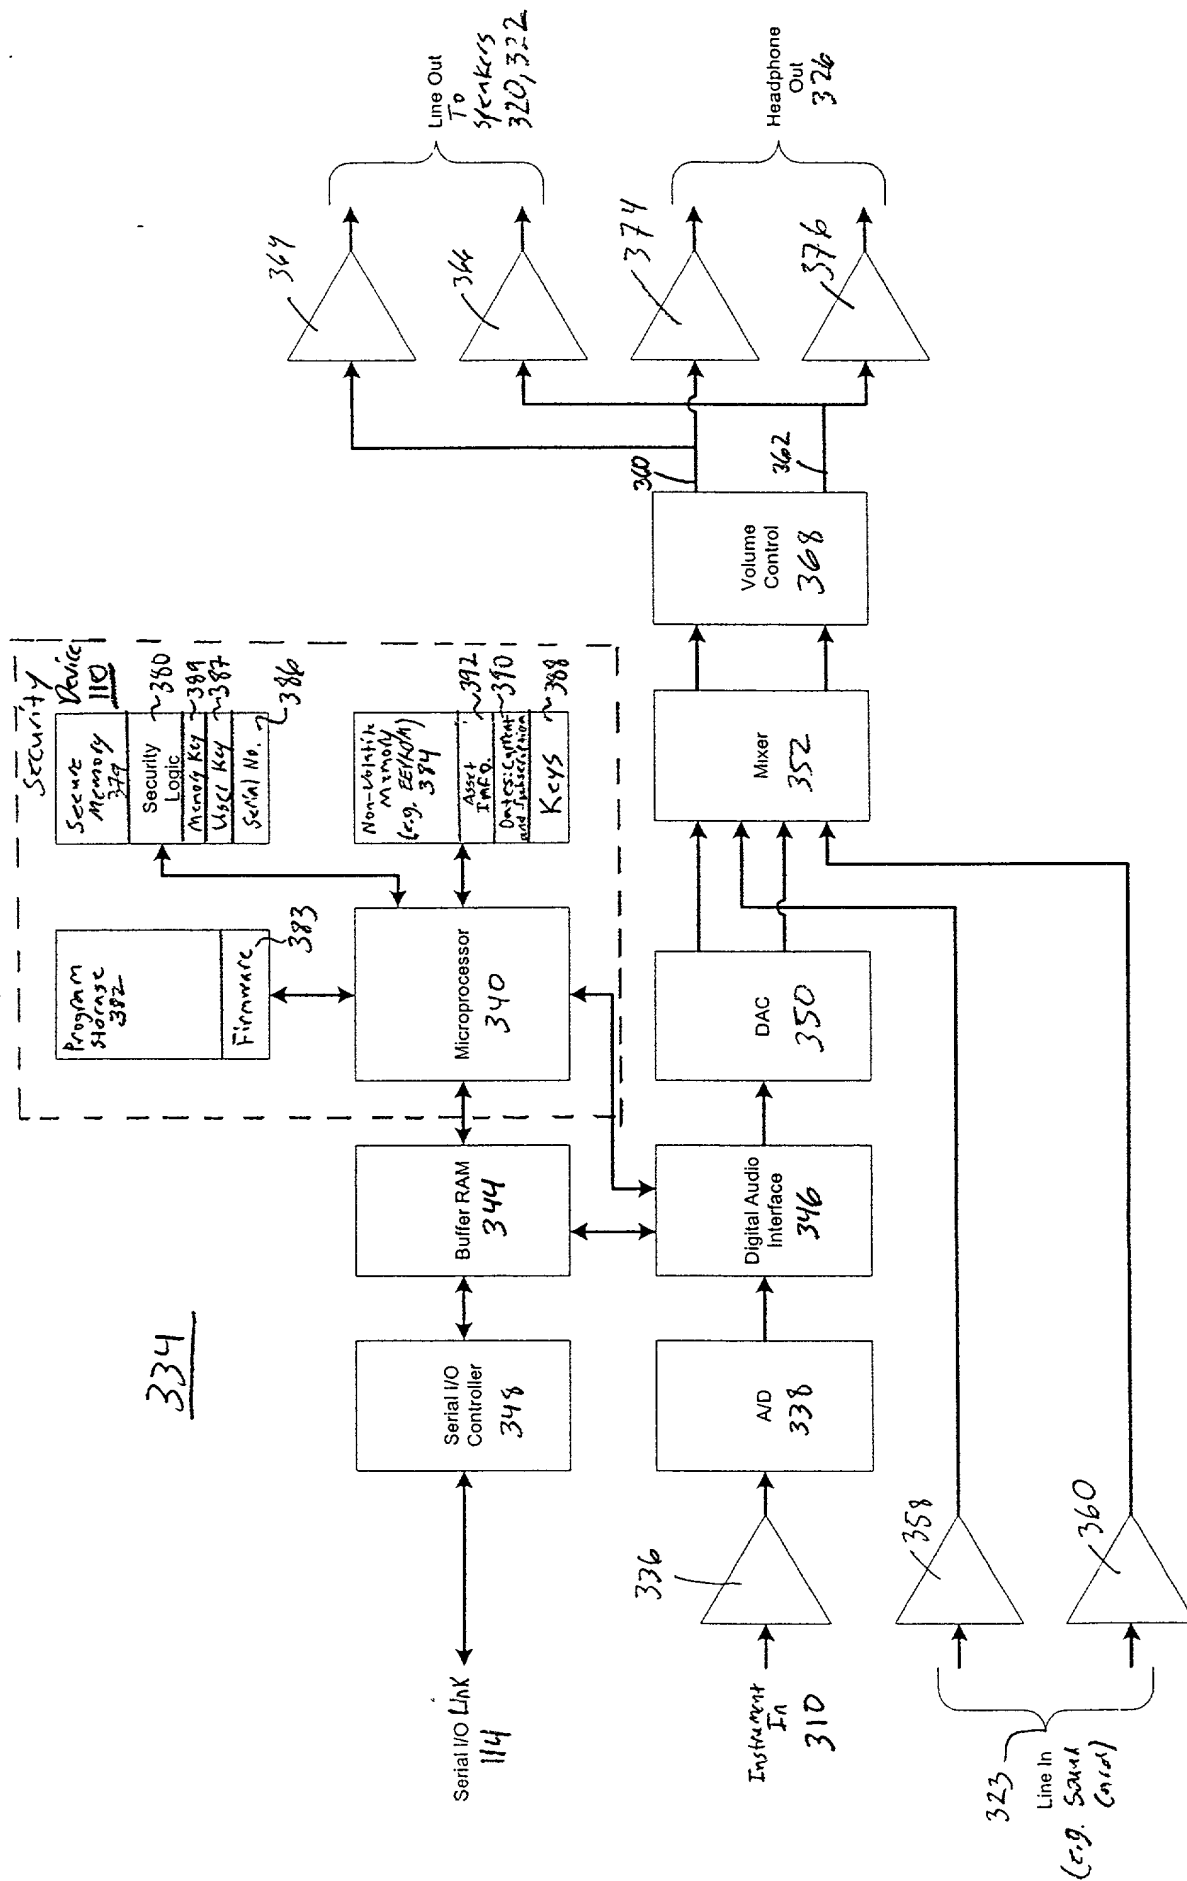


Figure 3d

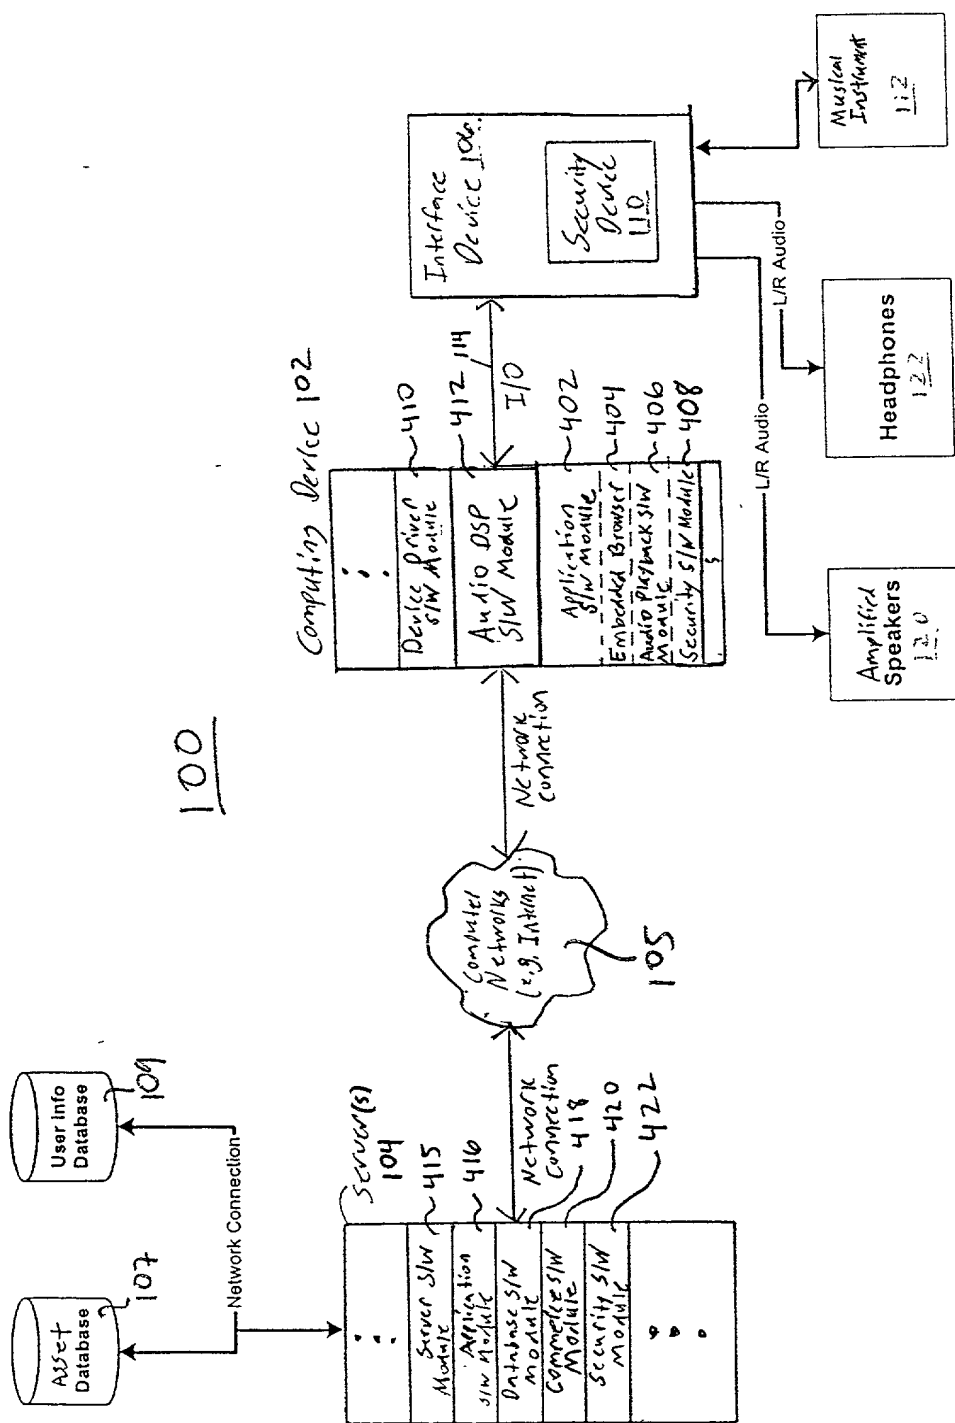


Figure 4

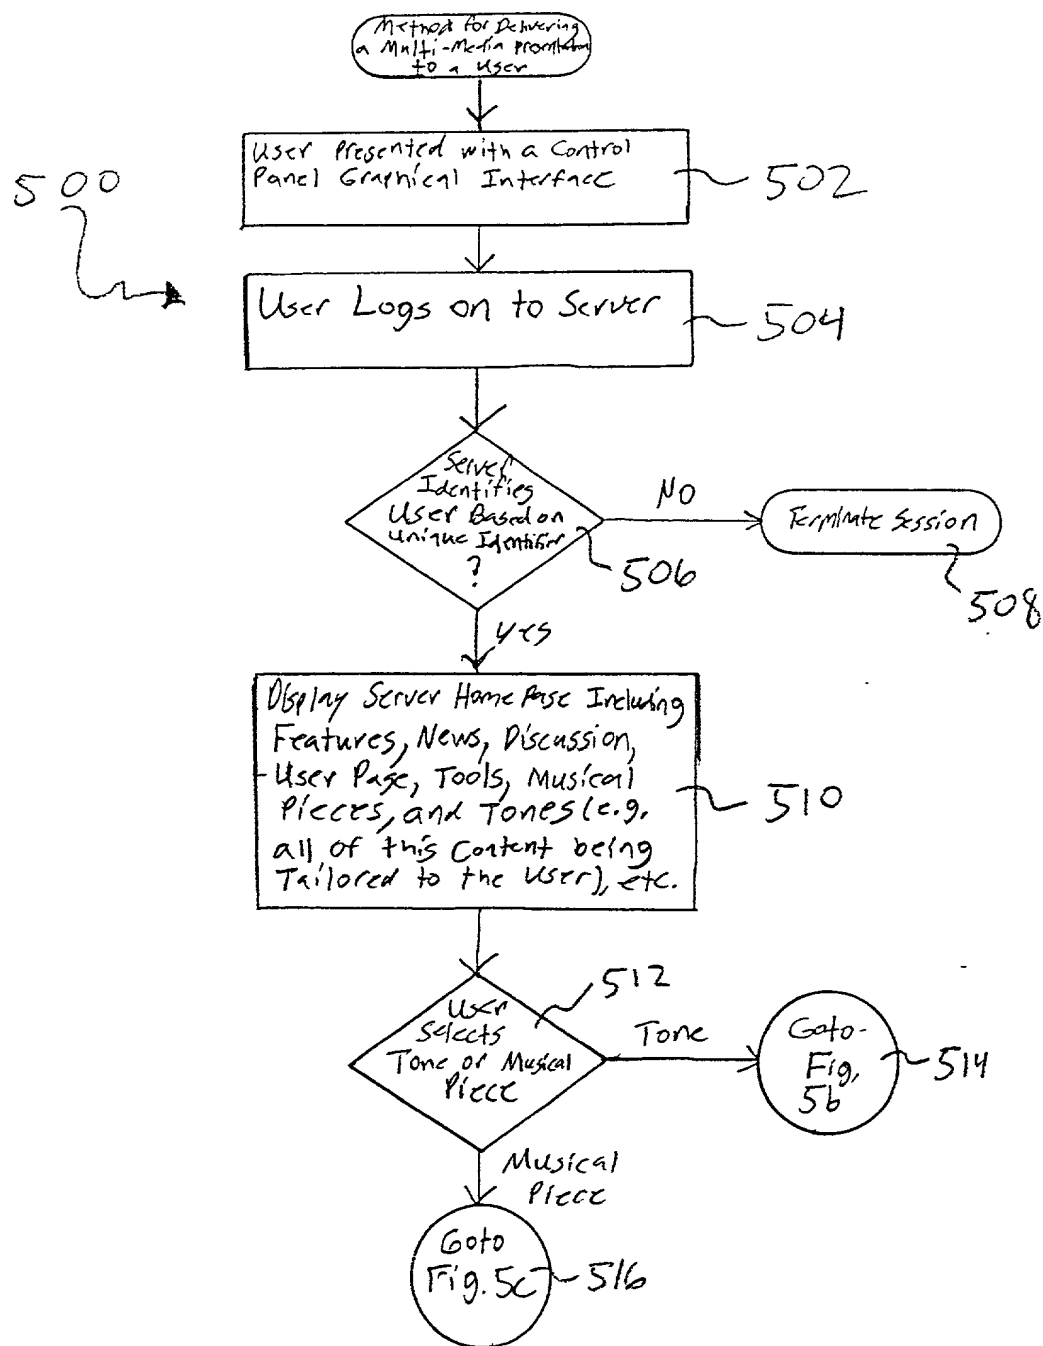


Figure 5a

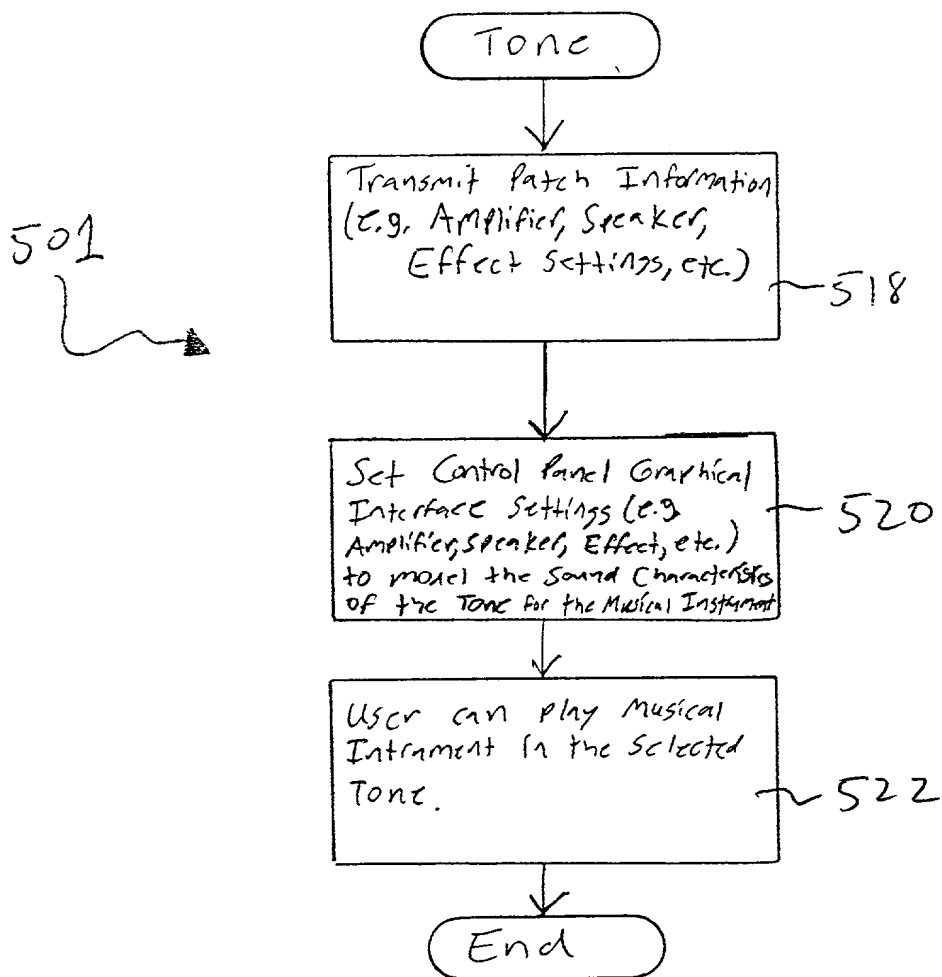


Figure 5b

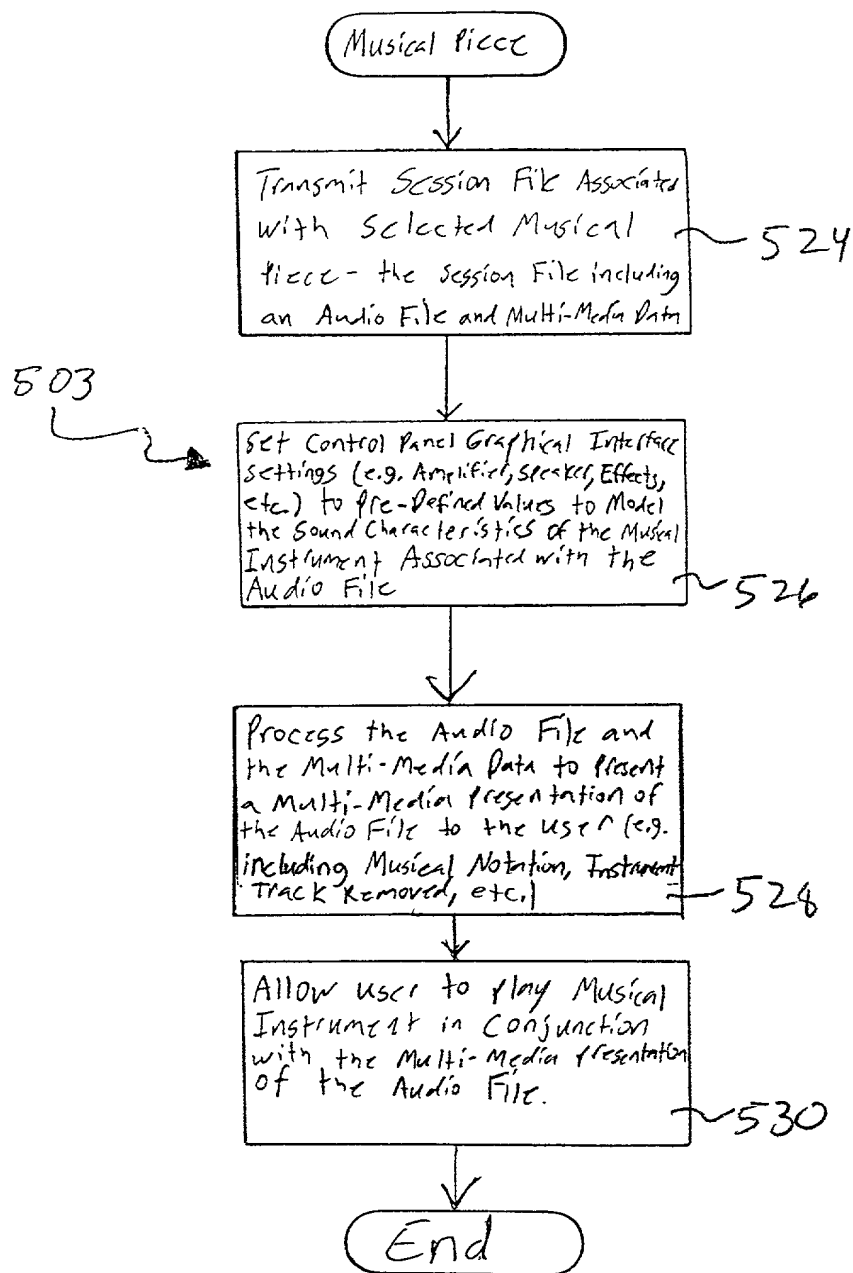


Figure 5C

Session File

539

Audio File (e.g. Full guitar track (removed vocals removed, bass removed, etc.))	HTML embedded w/ JAVA script to Reinsert and Display Information	Patch Information to Reinsert Amplifier, Speakers, Effect Settings, etc.	MIDI File to Reinsert Tempo Changes, Program Changes, Key Signature Changes, Position Markers, etc.
540	542	544	546

Figure 5d

700

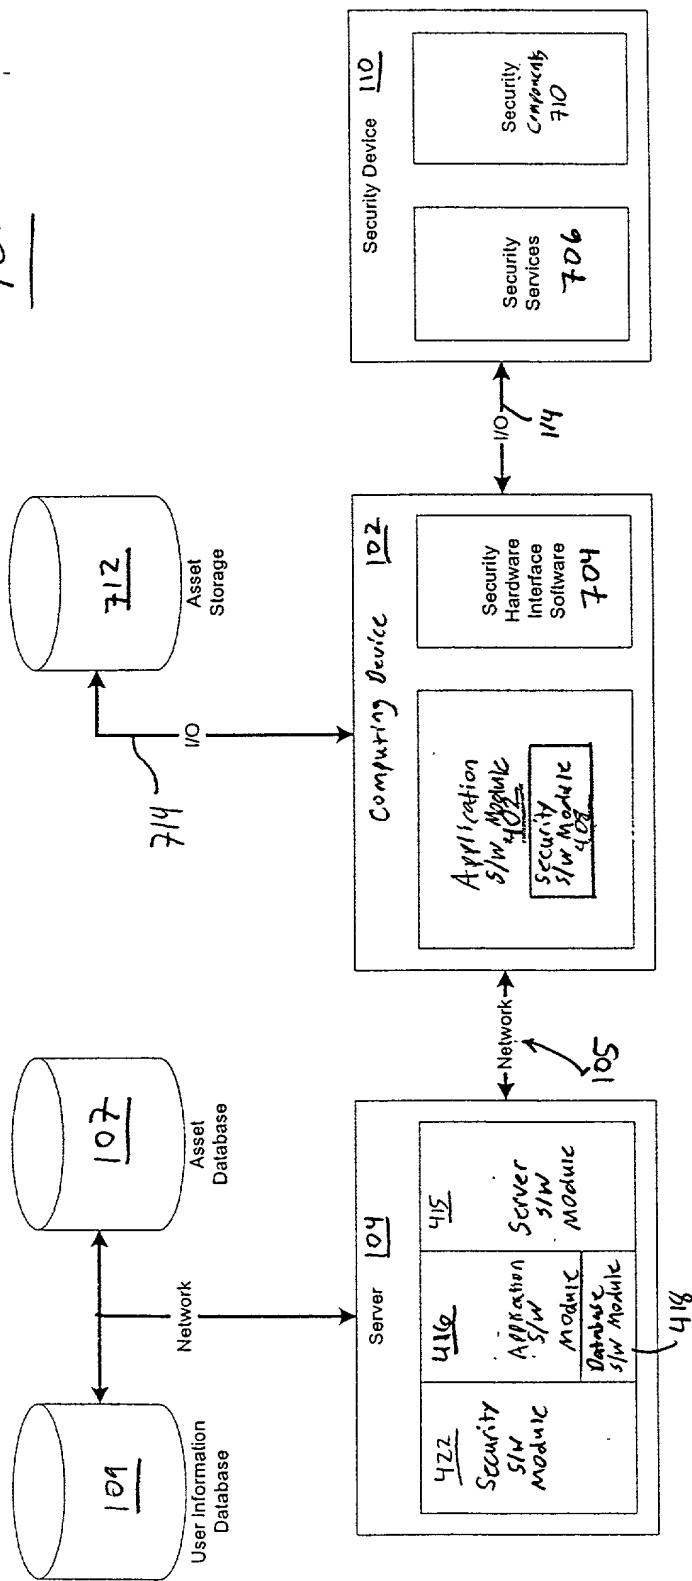


Figure 7a

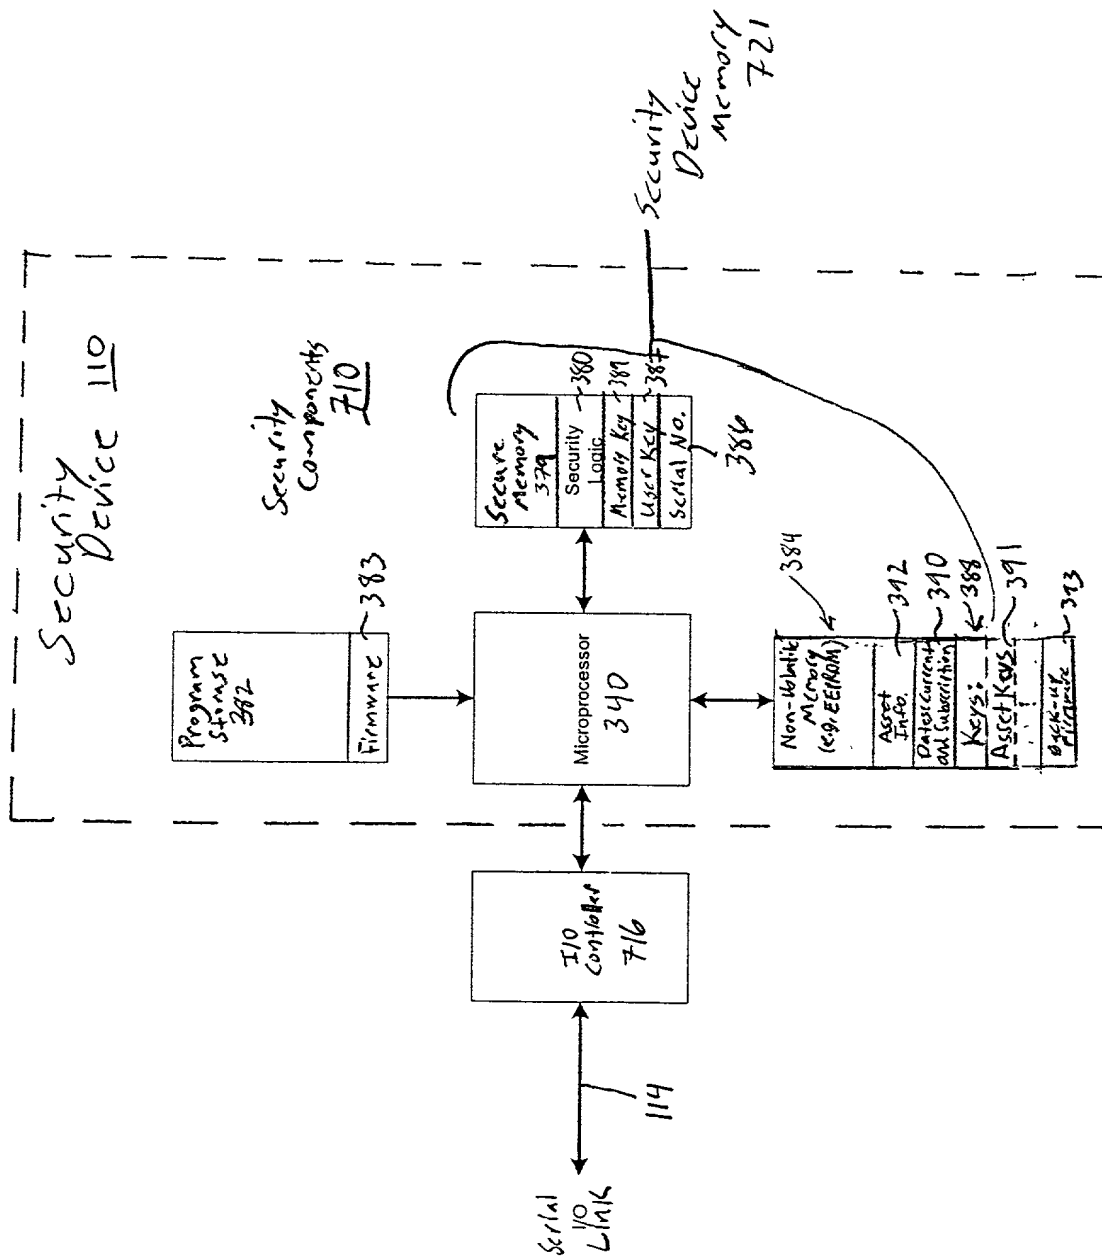


Figure 7b

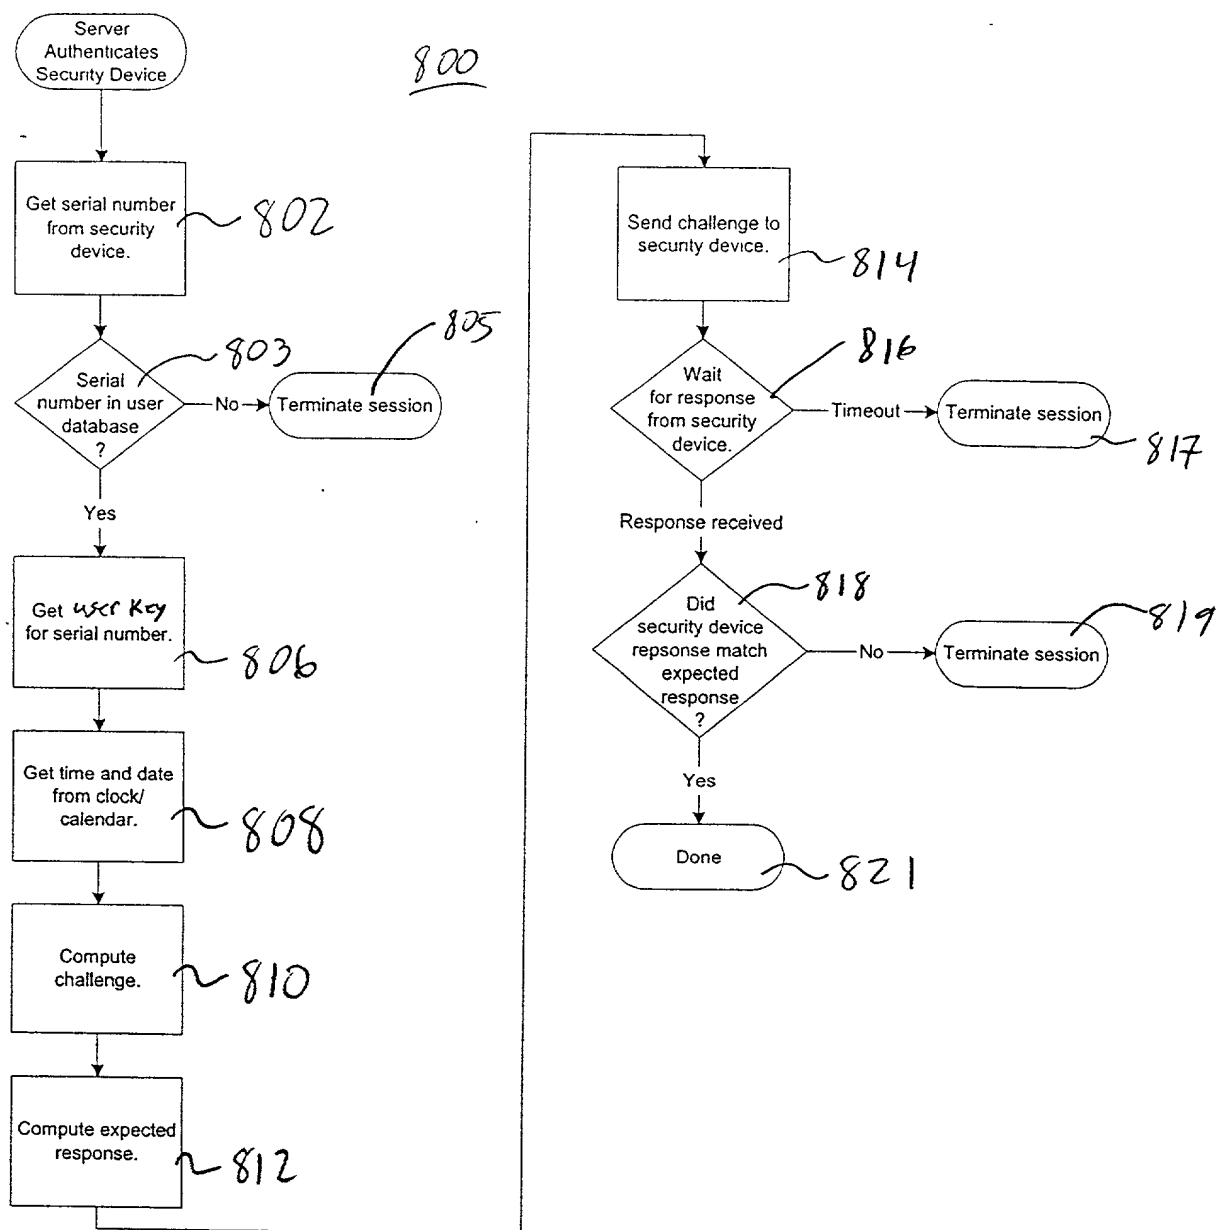


Figure 8a

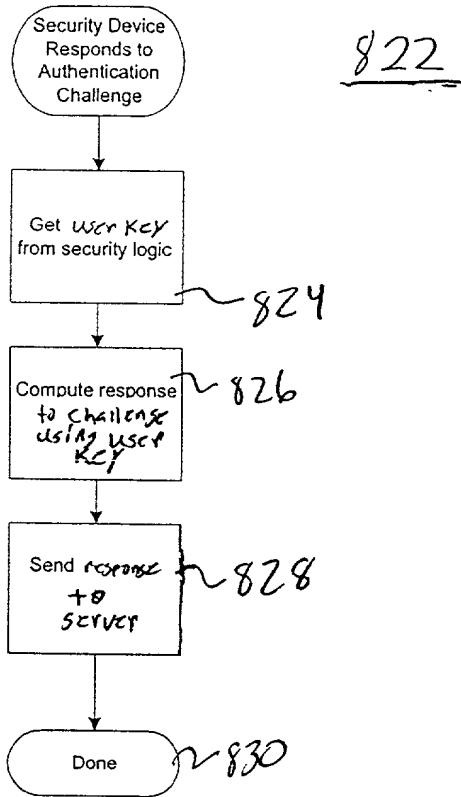


Figure 8b

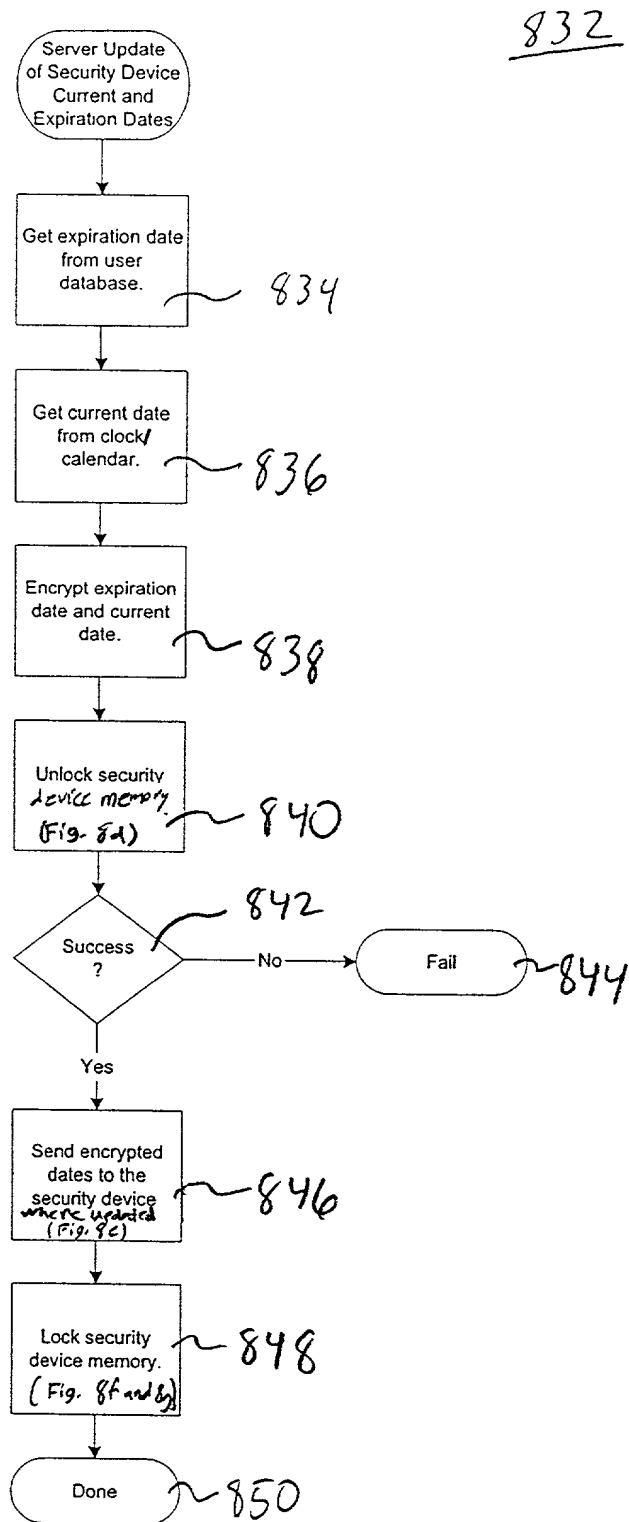


Figure 8c

852

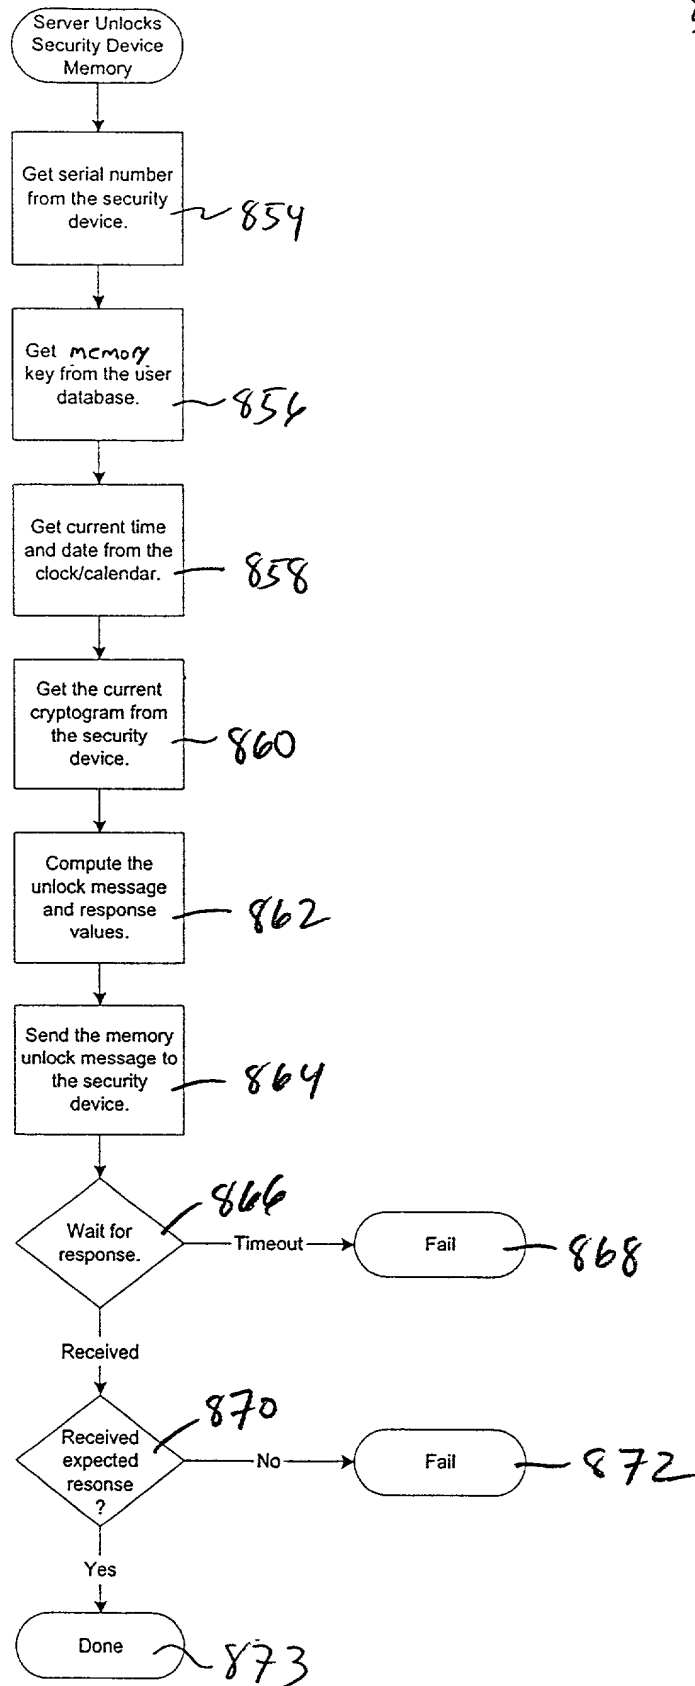


Figure 8d

874

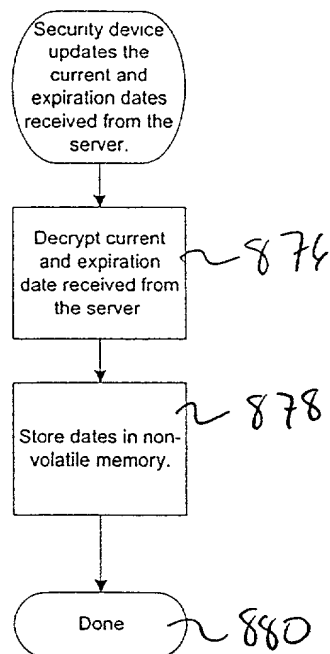


Figure 8c

882

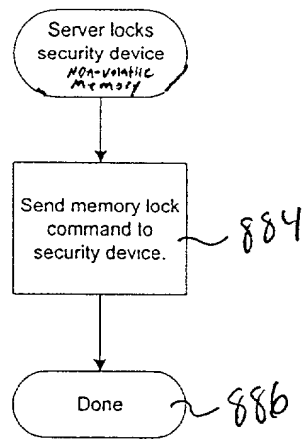


Figure 8f

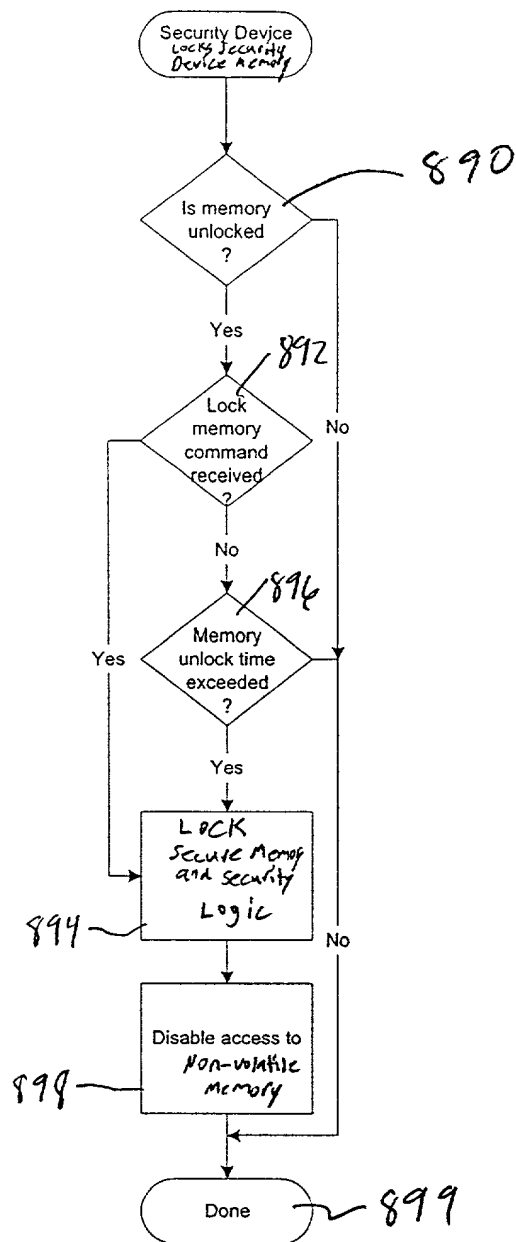


Figure 85

801

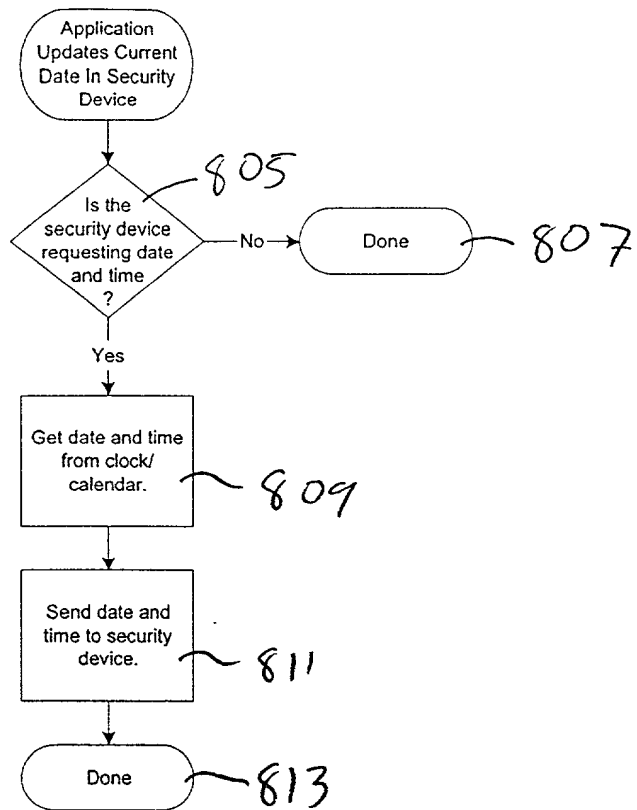


Figure 8h

815

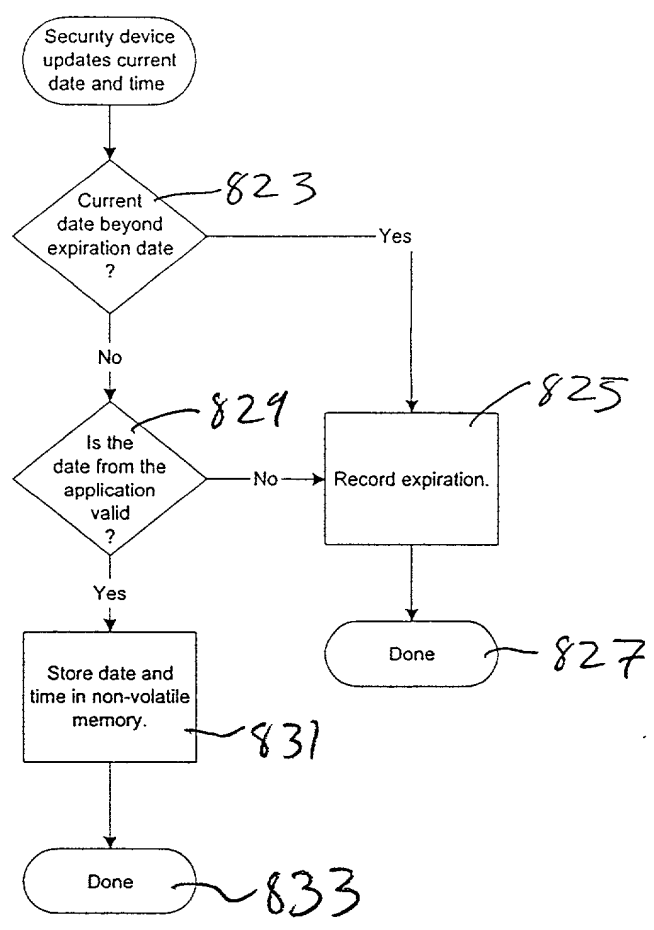


Figure 8i

900

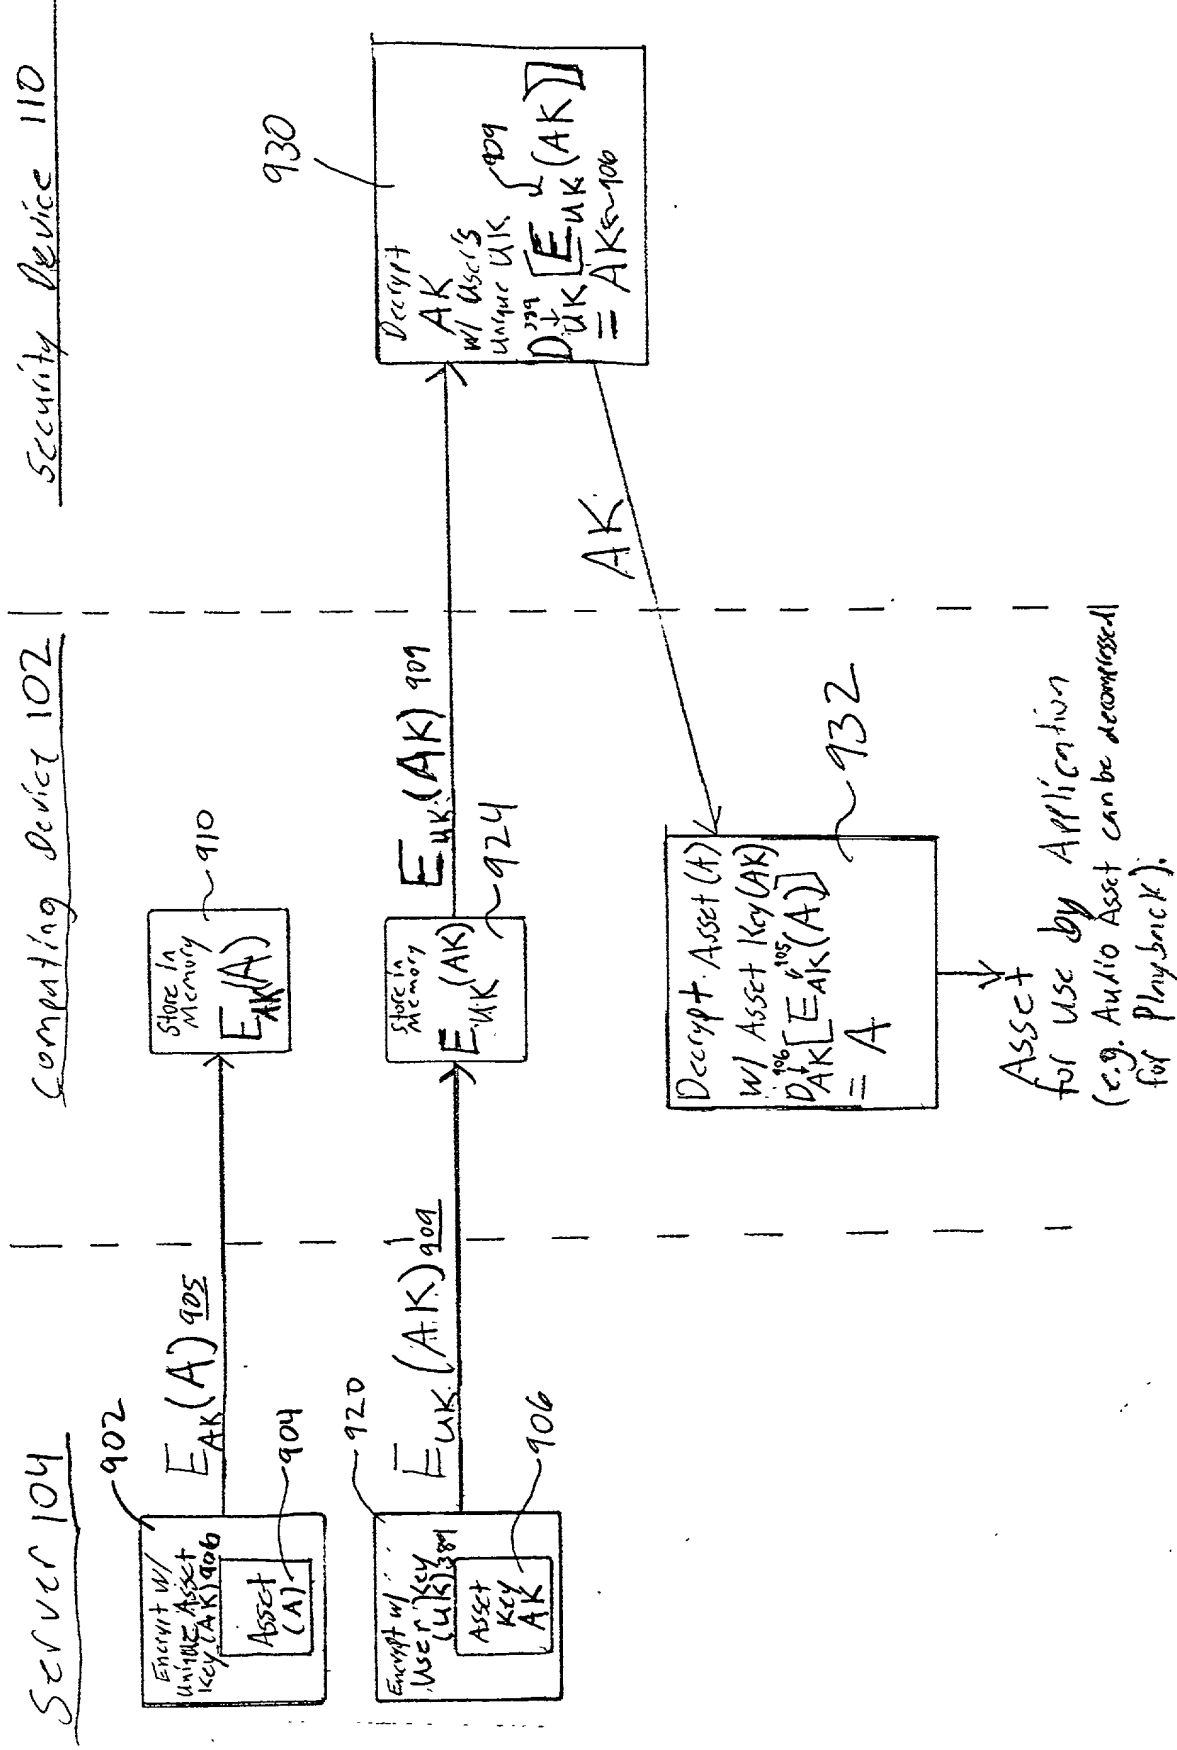


Figure 9

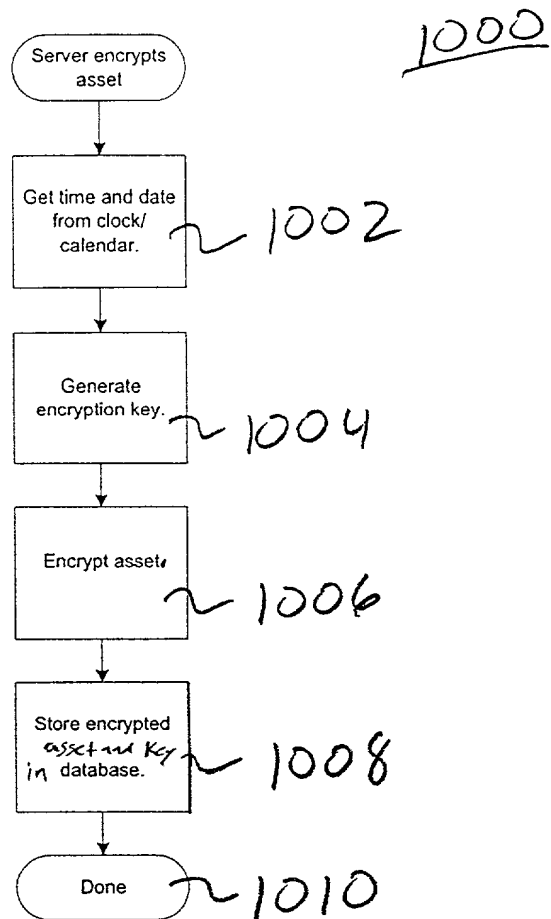


Figure 10a

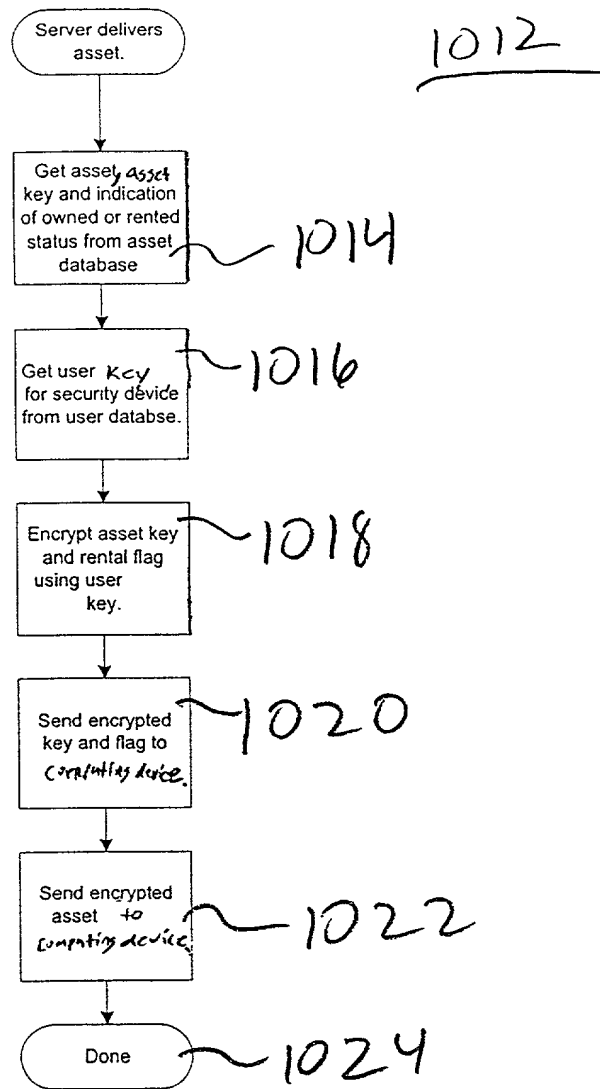


Figure 10b

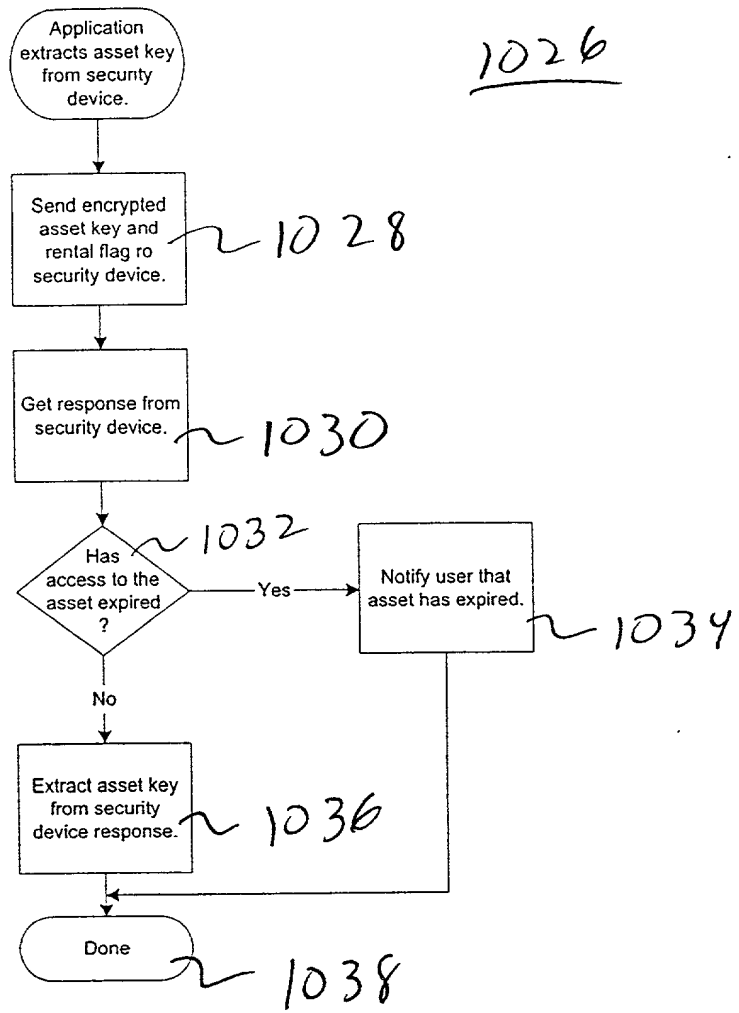


Figure 10c

Application
decrypts asset.

1040

Initialize
decryption
algorithm with
asset key received
from security
device.

~1042

Load encrypted
asset into
memory.

~1044

Decrypt memory
copy of
encrypted asset.

~1046

Done

~1048

Figure 10d

